


# 1 1/2" THREAD SHIELDS

Original THS-1 \$2.24  
Magnetic THS-2 \$2.71

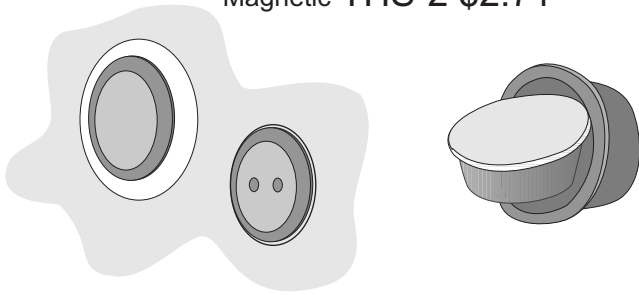

- Both protect threads of 1 1/2" return fittings during plastering, guniting, etc.
- Both eliminate need to "clean out" threads at start up.
- Both insert easily.
- Both have two part construction making removal easy.
- NO MORE "LOST FITTINGS". Blue and yellow colors make the locating of plumbing easy during and after the plastering operation.
- Both reduce "water drip" from plumbing.
- **THS-2 Can be located by our THREAD SHIELD DETECTOR even when buried 1/2" under the pool surface.**

# THREAD SHIELD DETECTOR

TSD-1 \$16.05

- Locates the "lost" plumbing port when a THS-2 thread shield or an "M" version of a Pipe Shield (PSH-1.0M, or PSH-1.5M) was used during construction and/or "plastering" operation.
- Also locates embedded steel re-bar in order to avoid hitting re-bar when cutting an additional port through wall.
- Works equally well when pool is empty or full of water.
- Waterproof.
- Weighted to make searching easy.
- 35" strap.
- Rugged impact resistant construction.




# 1" & 1 1/2" PIPE SHIELDS

Schedule 40

PSH-1.0 \$1.39      PSH-1.0M \$1.83  
PSH-1.5 \$2.09      PSH-1.5M \$2.53

- Protect the inside of 1" and 1 1/2" schedule 40 pipe while guniting, painting, plastering, etc.
- Prevents partially clogged plumbing lines.
- Two part construction for easy removal.
- Reusable
- The "M" version can be detected even if buried under up to 1/2 inch of pool surface.

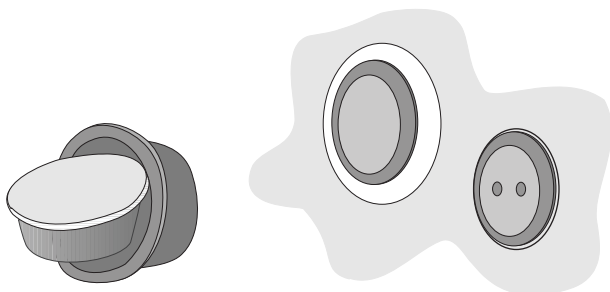

# SNAP FITTINGS

The Quick solution to a "dripping glue joint".

- 1) Simply remove pressure from dripping glue joint.
- 2) Apply glue to inside of SNAP FITTING and to the leaking area at the pipe to fitting joint that is leaking.
- 3) Snap on the SNAP FITTING centering it over the leak, covering both the fitting and the pipe.
- 4) Allow glue to dry before pressurizing.

Available Sizes are:

3/4"	←	SNP-.75	\$2.21
1"	←	SNP-1.0	\$2.59
1 1/2"	←	SNP-1.5	\$2.97
2"	←	SNP-2.0	\$3.59
2.5"	←	SNP-2.5	\$5.13

