


1 1/2" THREAD SHIELDS

Original THS-1 \$2.04
Magnetic THS-2 \$2.46

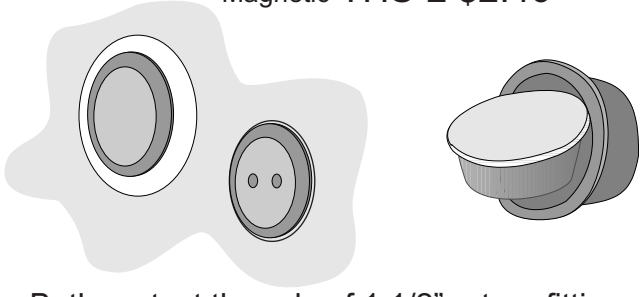

- Both protect threads of 1 1/2" return fittings during plastering, guniting, etc.
- Both eliminate need to "clean out" threads at start up.
- Both insert easily.
- Both have two part construction making removal easy.
- **NO MORE "LOST FITTINGS"**. Blue and yellow colors make the locating of plumbing easy during and after the plastering operation.
- Both reduce "water drip" from plumbing.
- **THS-2 Can be located by our THREAD SHIELD DETECTOR even when buried 1/2" under the pool surface.**

THREAD SHIELD DETECTOR

TSD-1 \$14.60

- Locates the "lost" plumbing port when a THS-2 thread shield or an "M" version of a Pipe Shield (PSH-1.0M, or PSH-1.5M) was used during construction and/or "plastering" operation.
- Also locates embedded steel re-bar in order to avoid hitting re-bar when cutting an additional port through wall.
- Works equally well when pool is empty or full of water.
- Waterproof.
- Weighted to make searching easy.
- 35" strap.
- Rugged impact resistant construction.




1" & 1 1/2" PIPE SHIELDS

Schedule 40

PSH-1.0 \$1.26 PSH-1.0M \$1.67
PSH-1.5 \$1.90 PSH-1.5M \$2.30

- Protect the inside of 1" and 1 1/2" schedule 40 pipe while guniting, painting, plastering, etc.
- Prevents partially clogged plumbing lines.
- Two part construction for easy removal.
- Reusable
- The "M" version can be detected even if buried under up to 1/2 inch of pool surface.

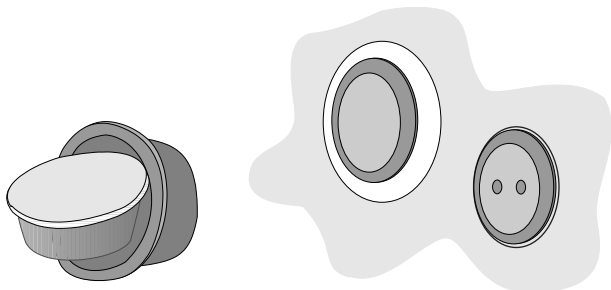

SNAP FITTINGS

The Quick solution to a "dripping glue joint".

- 1) Simply remove pressure from dripping glue joint.
- 2) Apply glue to inside of SNAP FITTING and to the leaking area at the pipe to fitting joint that is leaking.
- 3) Snap on the SNAP FITTING centering it over the leak, covering both the fitting and the pipe.
- 4) Allow glue to dry before pressurizing.

Available Sizes are:

- 3/4" ← SNP-.75 \$2.01
- 1" ← SNP-1.0 \$2.35
- 1 1/2" ← SNP-1.5 \$2.70
- 2" ← SNP-2.0 \$3.26
- 2.5" ← SNP-2.5 \$4.67

