

POLE PIVOT

PLP-1

Adjustable Pole-End
Angle Connector



- Pole Pivot has a rugged push button release mechanism that attaches to the end of any standard pole
- Adjust your brush angle to get better leverage.
- Pivot and lock any net, Brush or Vacuum Head into the optimum operating angle needed.




TFP-1.5, TFP-2.0

Stops the flow of water while repairing a flooded plumbing system.

Designed to temporarily seal off schedule 40 PVC

Easily removed after plumbing repair is complete

Tested to hold with four foot of static water head.

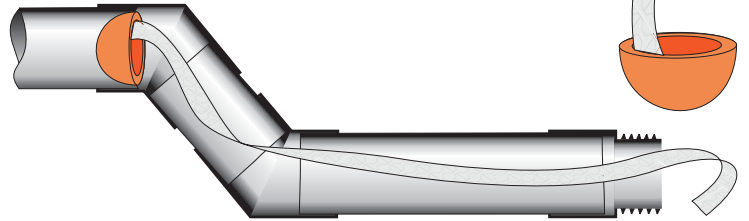

SIMPLE TO USE:

- 1) Insert the round side of the plug into the flooding schedule 40 pipe.
 - 2) Slip new fittings and pipe sections over the two foot long tail.
 - 3) Glue the new pieces in place.
- NOTE: Avoid getting glue on the tail as much as possible.
- 4) When the repair is complete, pull on the tail to remove the plug. The FLOOD PLUG will easily pass through 90s, 45s, tees, male adapters, and pipe on its way out.

SOCKET SAVERS

SKS-4.0, SKS-3.0, SKS-2.0, SKS-1.5,
SKS-1.0, SKS-.75, SKS-.50

Seven Sizes to choose from - 4", 3", 2", 1 1/2", 1", 3/4", 1/2"



- Removes schedule 40 PVC pipe leaving the old fitting socket ready to reuse.
- Sturdy steel construction for long life.
- Fits any 1/2" variable speed drill.
- Carded for display.

